


THE SCIENCE OF FINISHING

Batch Vibratory

VB-Series

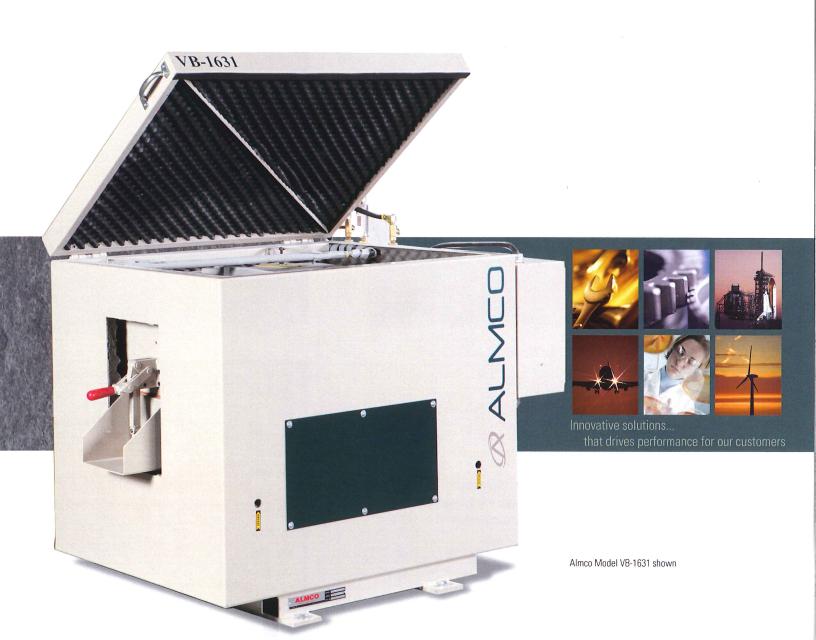

Features:

- Economically priced batch vibratory machine with "plug type" end discharge door
- Comes in multiple size models: (see chart below)
- Wet or dry processing capabilities
- 3HP to 10HP (depending on model) integral constant speed-drive. Your choice of 230 or 460 Volt, 3 phase, 60 cycle operation
- Runs standard at 1,750 vibrations per minute (VPM). Motor can be adjusted manually by variable pitch sheave from 1,400 to 2,000 VPM
- Comes standard with sound deadening enclosure on some models
- Variable amplitude from 1/64" to 1/4" of up and down action
- 1" thick, cast molded polyurethane lining
- NEMA 12 enclosure equipped with start, stop buttons and a LCD timer for process repeatability time cycle control
- Economical finishing for parts
- Several units available from stock at Almco factory
- Free sample processing for complete media/compound recommendation






- A. Tachometer
- B. Elapsed Time Recorder
- C. Economy Pump w/Tank & Hydrominder

Optional Accessory:

PS-1 Portable Screener

Parts-Media Portable Screener controlled by an electro-magnetic variable electronic speed control unit is equipped with one screen (nylon coated steel). Overall dimensions are 35" long, 20" wide and 25" high. Voltage 115 V. Various screen sizes available.

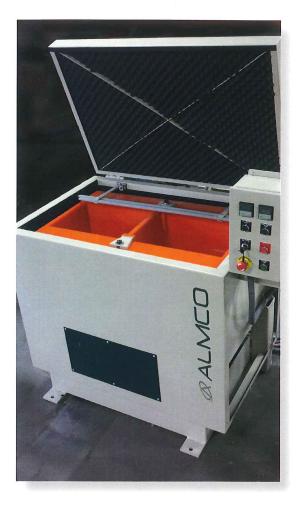

Model	H.P.	Cubic Foot Capacity
VB-1432	5	3.6
VB-1448	5	5.5
VB-1460	7.5	6.8
VB-1472	7.5	8.2
VB-1615	3	2.5
VB-1631	5	5
VB-2015	3	3.5
VB-2034	7.5	7
VB-2048	7.5	10
VB-2056	7.5	12.7
VB-2418	5	6
VB-2434	7.5	10
VB-3420	10	12
VB-3818	10	14

ALMCO offers a free sample part processing laboratory for your product satisfaction, performance guarantee. Contact ALMCO today to learn more about this **free service**.



Corporate Office 507 West Front Street Albert Lea, MN 56007 P: 507.377.2102 800.521.2740 F: 507.377.0451